

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 June 2005 (23.06.2005)

PCT

(10) International Publication Number
WO 2005/057697 A2

(51) International Patent Classification⁷: **H01M 8/00**

(21) International Application Number:
PCT/JP2004/017892

(22) International Filing Date:
25 November 2004 (25.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-410509 9 December 2003 (09.12.2003) JP

(71) Applicant (for all designated States except US): **NISSAN MOTOR CO., LTD.** [JP/JP]; 2, Takara-cho, Kanagawa-ku, Yokohama-shi, Kanagawa 221-0023 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **OHMA, Atsushi** [JP/JP]; 1-43-20, Oooka, Minami-ku, Yokohama-shi, Kanagawa 232-0061 (JP).

(74) Agent: **GOTO, Masaki**; Shoyu-Kaikan, 3-1, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FUEL CELL STACK

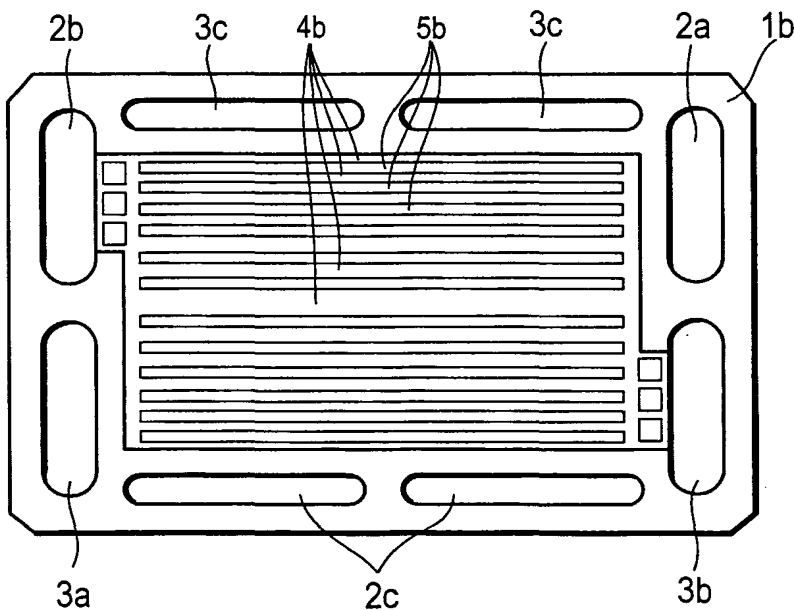

(57) Abstract: A fuel cell stack (10) comprises a plurality of stacked unit cells (11). Each unit cell (11) comprises a membrane electrode assembly (1a), and separators (1b, 1c) provided with ribs (5b) which contact the membrane electrode assembly (1a) to realize a current collecting function, and gas passages (4b) formed between the ribs (5b) for supplying a gas to a gas diffusion electrode (1p). The interior of the fuel cell stack (10) comprises a first region and a second region having a lower temperature than the first region. Any one of the gas passages (4b), the ribs (5b), and the gas diffusion electrode (1p) is constituted such that the gas diffusion through the gas diffusion electrode (1p) adjacent to the first region is improved beyond the gas diffusion through the gas diffusion electrode (1p) adjacent to the second region.

WO 2005/057697 A2